

Create perfect moments at home.







TILES | ADHESIVE | GROUT | BATHWARE

Blending Legacy with Innovation in the Heart of India's Ceramic Hub

Kyros Ceramics Pvt Ltd, a dynamic newcomer to the ceramic industry, is poised to make a significant impact with its commitment to quality, sustainability, and customer-centric solutions, Kyros Ceramics is built on a foundation of unparalleled experience and a vision for creating spaces that inspire and endure.

Kyros Ceramics is built on the vision of its founders, pioneers of Morbi's ceramic industry since 1986, with over 5 decades of experience. Backed by leadership roles at Asian Paints, Kansai Nerolac, and Prism Johnson, Kyros blends deep market insight with top-tier sales and marketing expertise to craft exceptional ceramic solutions that unite function and design.

Kyros Ceramics offers a wide range of tiles, adhesives, grouts, and bathware, providing tailored solutions for residential and commercial needs. With a rich legacy in tile-making, Kyros helps customers bring their design and construction visions to life.

A Comprehensive Product Portfolio:

Kyros Ceramics specializes in an array of high-quality ceramic products designed to meet diverse aesthetic preferences and functional requirements, including:

- Tiles: A diverse selection catering to various styles and applications.
- Adhesive Solutions: Advanced products engineered for optimal performance and long-lasting durability in tile installation.
- · Grouts: Durable options that ensure longevity and enhance the aesthetic appeal of both residential and commercial projects.

· Bath Ware: Stylish and functional solutions designed to elevate the beauty and utility of bathroom spaces.

A Commitment to Quality, Sustainability, and Custome Satisfaction:

Kyros Ceramics upholds top-quality standards and embraces sustainability across its entire supply chain, ensuring durability and eco-friendly practices in every product.

Grounded in Core Values

Kyros Ceramics' success is built on a foundation of core values:

- 1. Customer-Centric Approach: Placing customers at the heart of everything, striving to understand and meet their unique needs.
- 2. Integrity: Upholding the highest standards of integrity in business practices, ensuring transparency and trust with stakeholders.
- 3.I nnovation: Embracing change and integrating the latest technologies and trends into product offerings.
- 4. Sustainability: Promoting eco-friendly practices that contribute to a sustainable future for the industry and the planet.

Join the Kyros Ceramics Movement:

Explore the world of Kyros Ceramics and discover how the company can help bring your vision for beautiful and functional spaces to life. Whether you're embarking on a residential renovation or a large-scale commercial project, Kyros Ceramics is equipped to provide the expertise and products you need to achieve your goals.



Kyros Diamond: Where Durability Meets Design, Naturally

In today's world, finding materials that can withstand the rigors of daily life without sacrificing aesthetic appeal can be a challenge. Kyros Diamond Polished & Full Body Vitrified tiles offer a solution, seamlessly blending exceptional durability with breathtaking design inspired by the beauty of nature. These tiles are more than just a surface covering; they're an investment in long-lasting quality and timeless elegance.

Built to Endure: The Power of Vitrified Construction What sets Kyros Diamond tiles apart is their robust construction. These are not your average tiles; they are vitrified, meaning they are fired at extremely high temperatures, resulting in a dense, non-porous material that is incredibly strong.

But the real magic lies in their "full body" construction. Unlike tiles with a surface print, the colour and design of Kyros Diamond tiles permeate the entire thickness of the tile. This unique characteristic means that any chips or scratches that may occur over time remain virtually invisible, ensuring your floors and walls continue to look their best for years to come.

Versatility Redefined: From Commercial to Residential Spaces

This combination of durability and resilience makes Kyros Diamond tiles incredibly versatile. They are ideal for a wide range of applications, including:

Commercial Spaces: Malls, offices, showrooms, and retail environments will benefit from the tiles' ability to withstand heavy foottraffic and maintain their aesthetic appeal.

Industrial Settings: Demanding parking areas, robust godowns, and warehouses can rely on the tiles' strength and resistance to wear.

Residential Projects: From kitchens and bathrooms to living rooms and outdoor patios, Kyros Diamond tiles bring both beauty and practicality to any home.

Outdoor Applications: Serene gardens and patio spaces can benefit from the tiles' durability and resistance to the elements.

Inspired by Nature: Bringing the Outdoors In


Beyond their practical benefits, Kyros Diamond tiles offer a stunning array of designs inspired by the natural world. From the subtle textures of natural stone to the warm hues of aged marbles, these tiles capture the essence of nature's beauty. Using cutting-edge technology and superior manufacturing processes, Kyros Diamond replicates the look and feel of natural products sourced from around the globe, bringing a touch of the outdoors into your indoor spaces.

A Designer Mindset: Exceptional Products, Exceptional Value

Kyros Diamond is driven by a designer mindset, committed to creating exceptional product offerings that not only look beautiful but also provide long-lasting value. By blending practicality with aesthetic appeal, these tiles represent a perfect choice for both light commercial and domestic settings, offering a durable, beautiful, and enduring solution for your flooring and wall covering needs.

In conclusion, Kyros Diamond Polished & Full Body Vitrified tiles are more than just a surface covering; they are a statement of quality, durability, and timeless design. They offer the perfect blend of practicality and beauty, making them an ideal choice for anyone seeking to enhance their space with a touch of nature and a promise of lasting performance.




































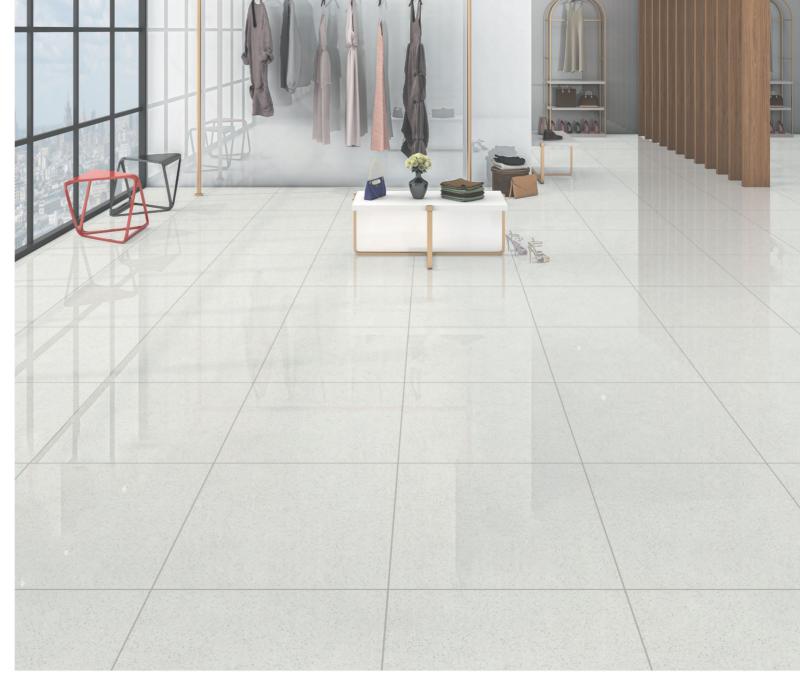











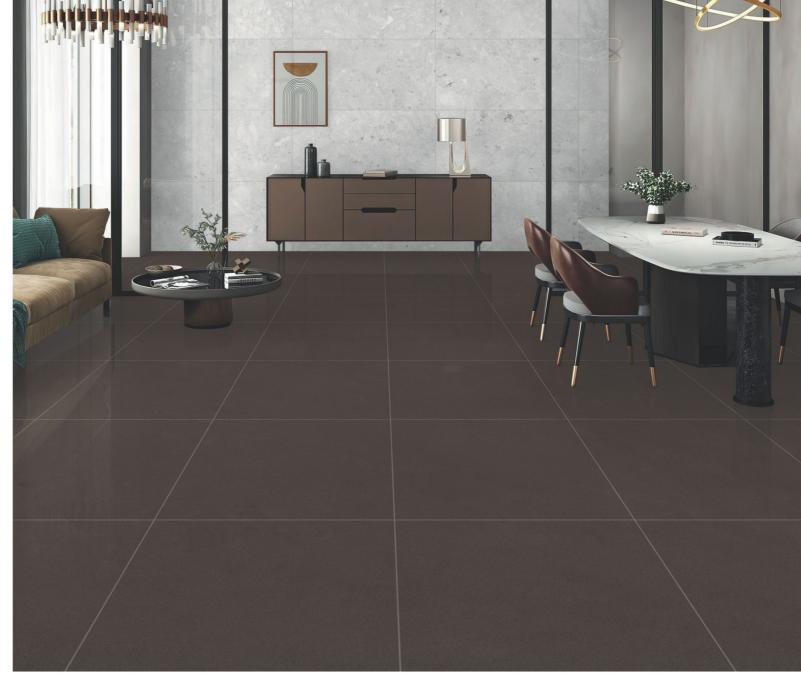











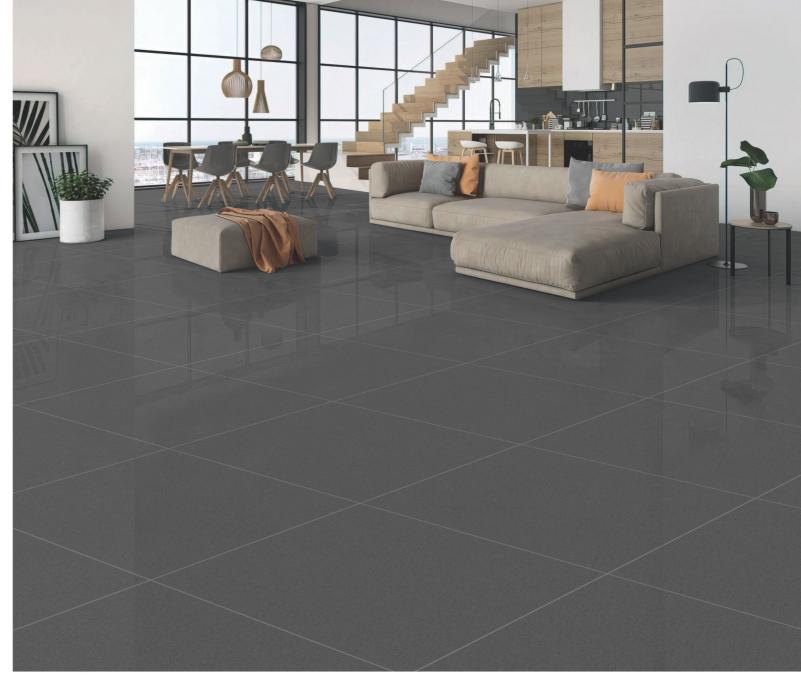




















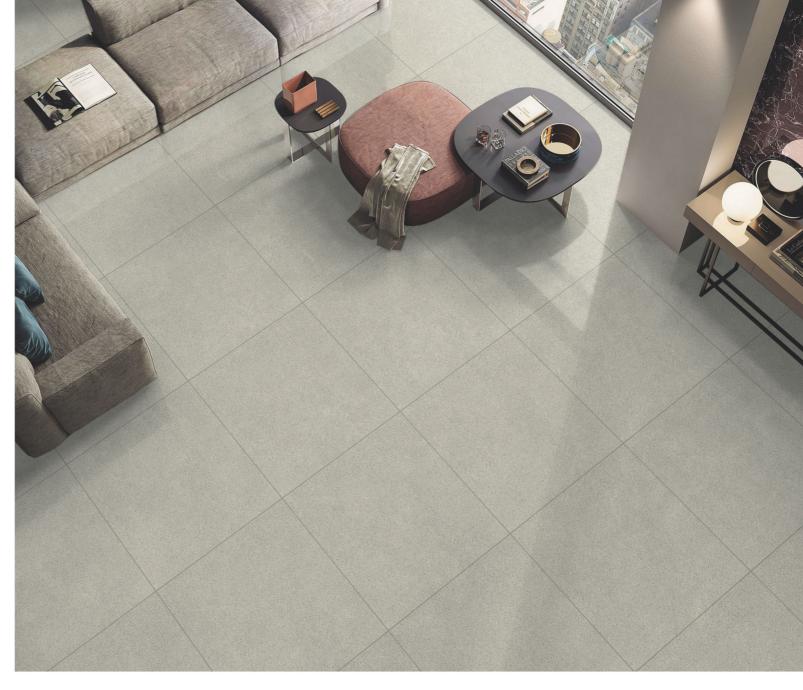










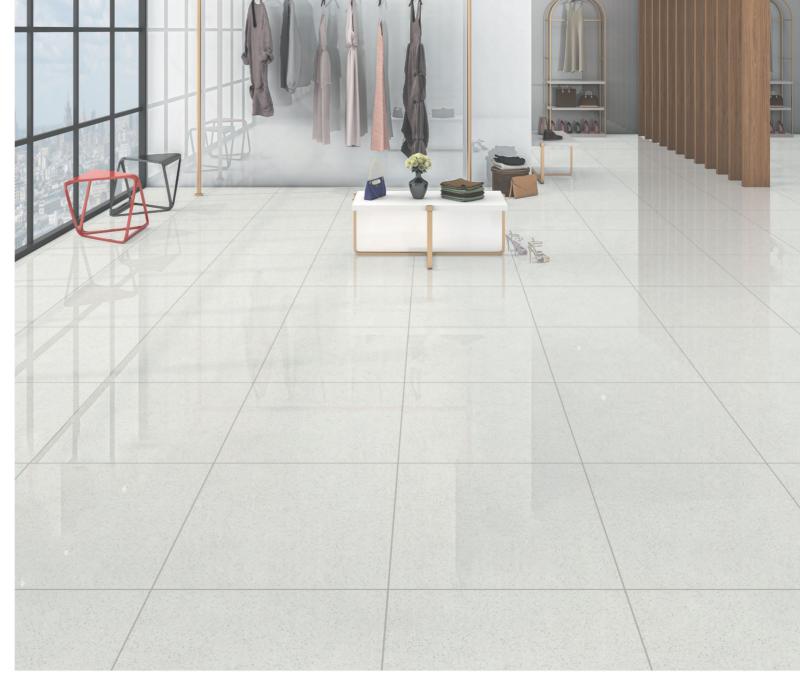





Laying Instructions

TILES FIXING INSTRUCTIONS

- 1. All the tiles must be checked prior to fixing for quality, batch no. and choice.
- 2. Plaster the surface of the floor to be tiled and allow curing atleast two weeks before tiling.
- 3. While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in
- 4. For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
- 5. For fixing tiles in floor using conventional method, we suggest the following laying instruction:
- A: use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.
- B: Apply 20-25MM of bedding materials over the floor area of 1.0SQM at a time.
- C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface.
- Do not use any heavy materials like iron or hammer to press tile.
- 6: For fixing the tools on Dado, we recommend the use of adhesive or equivalent materials.
- 7: Allow 3-4 days of bed curing after laying tiles and later fill the joints with grout.
- 8: We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
- 9: Please note that company will not accept any liability in case of any problems arising out of adherence of above fixing instructions.

DISCLAIMER: Reserves the right to delete and amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in the catalogue at any time. The colours shown in this catalogue are purely illustrative and limited to printing process. Please refer actual samples before final selection. The details of colours, sizes and references should be verified for photography errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLAINTS SHALL BE ENTERTAINED ON TILES ALREADY/FIXED.

APPLICATIONS













PUBS & BARS







RELIGIOUS





DOMESTIC

SHOPPING

OFFICES

GYMNASIUMS

Technical Specification of: VITRIFIED TILES

Sr. No.	Property	International Std. ISO 13006/En 176 Group Bla	Diamond Vitrified Value	Method of Testing
1	Deviation in Length	± 0.6%	± 0.1%	EN 98
2	Deviation in Thickness	± 5.0%	± 5.0%	EN 98
3	Straightness of Sides	± 0.5%	± 0.1%	EN 98
4	Rectangularity	± 0.6%	± 0.2%	EN 98
5	Surface Flatness	± 0.5%	± 0.2%	EN 98
6	Water Absorption*	<0.5%	<0.05%	EN 99
7	Mohs hardness*	>6	>8	EN 101
8	Flexural Straightness*	>27 N/mm2	>47 N/mm2	EN 100
9	Abrasion Resistance	<204 mm3	<144 mm3	En 102
10	Skid Resistance (Friction Coefficient)	>0.4	>0.6	ASTM C-1028
11	Breaking Strenght*	1113 N	2830 N	ASTM C-648
12	Density (g/cc)	>2	2.4	DIN 51082
13	Frost Resistance	Frost Proof	Frost Proof	EN 202
14	Chemical Resistance	No Damage	No Damage	EN 106
15	Thermal Shock Resistance	No Damage	No Damage	EN 104
16	Colour Resistance	No Damage	No Damage	DIN 51094
17	Thermal Expansion	<9 x 10-6	<6 x 10-6	03 EN 1
18	Stain Resistance	Resistant	Resistant	ISO 10454-14
19	Moisture Expansion	Nil	Nil	ISO 10545-10
20	Glossiness	-1	Min 65% - 70% reflection	Glossmeter

The reproduction of tiles in this catalogue is restricted to four colour printing only and tiles are not relative in sizes. Conforming to ISO requirements, technical specifications of Diamond Vitrified applicable only for first grade / first quality vitrified Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Price category may change without any notice. Customers are advised to confirm it before placing order.

Packing Details of: VITRIFIED TILES

Sr. No.	Size	No. of Tiles / Boxes	Coverage Area	
1	600x600mm	4	1.44 Sq.Mtr.	15.50 Sq.Ft.



KYROS CERAMICS PVT LTD

8-A, National Highway, Bandhunagar, Near Makansar, Morbi, Gujarat 363641

85111 19162 | www.kyrosceramics.com